



PRO

**PRODUCT CATALOGUE**



**CLEANING**



**CARE**



**HYGIENE**

**CLEANING SYSTEMS**

# Öztiryakiler



With more than 4500 different kind of high quality professional kitchen appliances and equipment ranging from preparation to cooking equipments, carrying to display units and from hot-cold lines to working benches and dishwashers, Öztiryakiler has been offering turnkey solutions and complete commercial kitchen design services since 1958. With 130.000 m2 production area equipped with latest technology, 1300 employees and more than 2000 internationally acknowledged product & product group certifications, we design, we produce and we install.

# index

<b>SURFACE CLEAN</b>	ALCOHOL-BASED GENERAL CLEANING PRODUCT	1
<b>NANO CLEAN PRO</b>	GENERAL CLEANING PRODUCT	2
<b>POWER FLOOR SMELL</b>	GENERAL CLEANING PRODUCT PERFUMED	2
<b>SANI EXTRA PRO</b>	BATHROOM, WC CLEANER	3
<b>SANITAR MAX PRO</b>	POWERFUL BATHROOM, WC CLEANER	4
<b>WC EXTRA PRO</b>	TOILET CLEANER	4
<b>POWER FLOOR 300</b>	FLOOR CLEANING AND POLISHING CARE PRODUCT	5
<b>POWER FLOOR 200</b>	HEAVY DIRT, VARNISH AND DEGREASER	5
<b>POWER FLOOR 100</b>	DELICATE SURFACES OF DIRT, PAINT AND OIL RIPPER-A VERSATILE CLEANER	6
<b>POWER FLOOR POLYMER</b>	CONTAINING POLYURETHANE ULTRA HARD FLOOR POLISH	6
<b>POWER FLOOR BRIGHT</b>	CRYSTALLIZED MARBLE POLISH	7
<b>FLOOR CARPET SHAMPOO</b>	DRY FOAM CARPET SHAMPOO	8
<b>FLOOR CARPET MAT</b>	ADJUSTABLE FOAM CARPET CLEANER	8
<b>POWER MATIC PRO</b>	DISH WASHER DETERGENT FOR HARD WATER	9
<b>POWER RINSE PRO</b>	MACHINE CLEAR GLOSS RINSING AGENT FOR HARD WATER	9
<b>POWER LIMEX PRO</b>	DESCALING DISH WASHER	9
<b>POWER HAND PRO</b>	HAND DISHWASHING ARTICLE HIGH-ACTIVE	10
<b>POWER FOAM PRO</b>	HEAVY DIRT AND OIL SOLVENT	10
<b>POWER PREP</b>	SPOT REMOVE PRE-DIPPING ARTICLE	10
<b>POWER GRILL</b>	OVEN AND GRILL CLEANING AGENT	11
<b>POWER T-9</b>	FOR OVEN AND GRILL HIGH PERFORMANCE OIL REMOVER	11
<b>POWER SHINE</b>	STAINLESS STEEL POLISH	11
<b>POWER INOX</b>	STAINLESS STEEL CLEANER	12
<b>POWER METALEX</b>	METAL TRACE CLEANING	13
<b>POWER HYPO PRO</b>	BASED LIQUID CHLORINE BLEACH	13
<b>POWER HYGIENE</b>	ALCOHOL-BASED FAST HYGIENIC CLEANER	13
<b>WHITE MATIC</b>	LITTLE SPARKLE MAIN CLEANING AGENT	15
<b>WHITE MATIC PRO</b>	COMPLATE CONTAINS BLEACH AND TAED MAIN WASHING AGENT	15
<b>COLOR MATIC PRO</b>	ENZYME, BLEACH MAIN WASHING AGENT	15
<b>OILEX MATIC PRO</b>	HEAVY DIRT, OIL AND BLOOD SOLVENT AUXILIARY WASHING AGENT	16
<b>OXYGEN MATIC PRO</b>	OXYGEN-BASED BLEACH AND STAIN REMOVER AUXILIARY WASHING AGENT	16
<b>CHLORINE MATIC PRO</b>	BASED CHOLORINE BLEACH AND STAIN REMOVER AUXILIARY WASHING AGENT	16
<b>SOFTENER</b>	FABRIC SOFTENER	16
<b>LIQUID HAND</b>	LIQUID HAND WASHING AGENT BLUE	17
<b>LIQUID HAND PRO</b>	LIQUID HAND WASHING AGENT WHITE	17
<b>FOAM HAND PRO</b>	FOAM HAND WASHING AGENT	17
<b>POWER HAND DEZENFEX</b>	ALCOHOL-BASED HAND HYGIENE CLEANING ARTICLE	18
<b>POWER FRESH</b>	AIR FRESHENER - FRAGRANCE OIL, LEMON FLAVORED	18
<b>ACCESSORIES PRODUCTS</b>		19
<b>DISHWASHER MACHINES</b>		20-23

# GENERAL CLEANING PRODUCTS


## SURFACE CLEAN

## ALCOHOL-BASED GENERAL CLEANING PRODUCT



Maintaining an in-depth cleaning of all washable surfaces and generally used for the purpose of alcohol-based cleaner. All furniture, mirrors, glass, plastic surfaces, lacquer, enamel, walls, natural and artificial stone, laminate, PVC, linoleum, polished wood and surfaces such as cork flooring and is suitable for use on all surfaces which include the dust. With the scent of lemon.

Art. No.	8899.P1012.01	8899.P1012.05
Packaging	1 L (0,98 kg) bottle	5 L (5,80 kg) can
Packaging Unit	12 pcs. in the box	4 pcs. in the box
Units Per Pallet	50 cartons	36 cartons



### SUITABLE SURFACES

			■ APPROPRIATE	■ CONTINGENT IN ACCORDANCE	■ NOT SUITABLE FOR
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy			
■ Linoleum	■ Marble	■ Wood (Polished)			
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate			
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces			
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel			
	■ Alum	■ Ceramics / Porcelain			



### DOSAGE AND WORKING METHODS



# GENERAL CLEANING PRODUCTS


## NANO CLEAN PRO

## GENERAL CLEANING PRODUCT




Re-lubricant or general cleaning produce which does not include pellicle. All the furniture, mirrors, glass, plastic surfaces, walls, laminate, PVC, artificial and natural stone floors, ceramic floors etc. Suitable for use on all surfaces and floors that can be taken as a strong dust general cleaner. Dries quickly without leaving traces on surfaces cleaned and stain. It contains refresh pine scent.

Art. No.	8899.P1006.20
Packaging	20 L (20,70 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can




### SUITABLE SURFACES

			■ APPROPRIATE	■ CONTINGENT IN ACCORDANCE	■ NOT SUITABLE FOR
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy			
■ Linoleum	■ Marble	■ Wood (Polished)			
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate			
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces			
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel			
	■ Alum	■ Ceramics / Porcelain			



### DOSAGE AND WORKING METHODS




## POWER FLOOR SMELL

## GENERAL CLEANING PRODUCT PERFUMED


All furniture, plastic surfaces, walls linoleum, PVC, rubber, ceramic, granite floors, etc. Suitable for use on all surfaces and floors can be as ammonia-free highly perfumed general cleaning product. Cleaning and stain surfaces without trace dries quickly, does not require rinsing. Persistent has a tropical scent.

Art. No.	8899.P1027.20
Packaging	20 L (20,00 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can



### SUITABLE SURFACES

			■ APPROPRIATE	■ CONTINGENT IN ACCORDANCE	■ NOT SUITABLE FOR
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy			
■ Linoleum	■ Marble	■ Wood (Polished)			
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate			
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces			
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel			
	■ Alum	■ Ceramics / Porcelain			



### DOSAGE AND WORKING METHODS



# BATH, WC CLEANING PRODUCTS


## SANI EXTRA PRO

## BATHROOM, WC CLEANER




Sanitary spaces (bathroom, wc, shower areas) and acid-resistant surfaces cleans the floors, provide care, material, while maintaining a strong and rapidly limes, oil stains, urea blocks hygienically clean. Especially fountains, sinks, shower cabin, bathtubs, urinals environmet, acid-resistant ceramic floors above, and used for cleaning. Does not include paint, so the paint on the open-pored material does not leave residues. Red is the color code in order to avoid confusion. The product shouldn't use for all materials used for marble, artificial stone and acid-sensitive.

Art. No.	8899.P1009.75	8899.P1009.05
Packaging	750 ml bottle	5 L (5,00 kg) can
Packaging Unit	6 pcs. in the box	4 pcs. in the box
Units Per Pallet	50 cartons	36 cartons



### SUITABLE SURFACES

			■ APPROPRIATE	■ CONTINGENT IN ACCORDANCE	■ NOT SUITABLE FOR
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy			
■ Linoleum	■ Marble	■ Wood (Polished)			
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate			
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces			
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel			
	■ Alum	■ Ceramics / Porcelain			



### DOSAGE AND WORKING METHODS



# BATH, WC CLEANING PRODUCTS

## SANITAR MAX PRO


## POWERFUL BATHROOM, WC CLEANER

All sanitary spaces (wc, bath, shower areas) accumulated lime deposits, rust, urine residue, traces of greasy dirt and soap, quickly removes stubborn dirt, such as cement residues, hygiene. Protects the material during clean-up, prevents corrosion damage. Especially fountains, sinks, shower cabin, bathtubs, urinals surroundings, via acid-resistant ceramic floors and grouting gaps can be used for cleaning. **The product shouldn't use for all materials used for marble, artificial stone and acid-sensitive.**




Art. No.	8899.P1013.01	8899.P1013.05
Packaging	1 L (0,98 kg) bottle	5 L (4,90 kg) can
Packaging Unit	12 pcs. in the box	4 pcs. in the box
Units Per Pallet	50 cartons	36 can

pH-value of about




### SUITABLE SURFACES

<input checked="" type="checkbox"/> PVC	<input checked="" type="checkbox"/> Acid-resistant natural / plastic material	<input checked="" type="checkbox"/> Epoxy
<input checked="" type="checkbox"/> Linoleum	<input checked="" type="checkbox"/> Marble	<input checked="" type="checkbox"/> Wood (Polished)
<input checked="" type="checkbox"/> Elastomeric material (rubber)	<input checked="" type="checkbox"/> Cast Mosaic (Terrazzo)	<input checked="" type="checkbox"/> Laminate
<input checked="" type="checkbox"/> Polyurethane	<input checked="" type="checkbox"/> Acid Proof Tiles	<input checked="" type="checkbox"/> Plastic Surfaces
<input checked="" type="checkbox"/> Enriched polyurethane elastic floor coverings	<input checked="" type="checkbox"/> Porcelain	<input checked="" type="checkbox"/> Chrome / Stainless Steel
	<input checked="" type="checkbox"/> Alum	<input checked="" type="checkbox"/> Ceramics / Porcelain



### DOSAGE AND WORKING METHODS



## WC EXTRA PRO


## TOILET CLEANER

For Closets and urinals rust, lime, oil, urea accumulated layers are used to provide clean and hygienic. Adheres to vertical surfaces because it is a dense, curly head of the bottle allows easy access of the product to the desired point. Blocking urine smell is pleasant and long lasting fragrance.



Art. No.	8899.P1010.75
Packaging	750 ml. bottle
Packaging Unit	6 pcs. in the box
Units Per Pallet	50 cartons

pH-value of about



### SUITABLE SURFACES

<input checked="" type="checkbox"/> PVC	<input checked="" type="checkbox"/> Acid-resistant natural / plastic material	<input checked="" type="checkbox"/> Epoxy
<input checked="" type="checkbox"/> Linoleum	<input checked="" type="checkbox"/> Marble	<input checked="" type="checkbox"/> Wood (Polished)
<input checked="" type="checkbox"/> Elastomeric material (rubber)	<input checked="" type="checkbox"/> Cast Mosaic (Terrazzo)	<input checked="" type="checkbox"/> Laminate
<input checked="" type="checkbox"/> Polyurethane	<input checked="" type="checkbox"/> Acid Proof Tiles	<input checked="" type="checkbox"/> Plastic Surfaces
<input checked="" type="checkbox"/> Enriched polyurethane elastic floor coverings	<input checked="" type="checkbox"/> Porcelain	<input checked="" type="checkbox"/> Chrome / Stainless Steel
	<input checked="" type="checkbox"/> Alum	<input checked="" type="checkbox"/> Ceramics / Porcelain



### DOSAGE AND WORKING METHODS




# FLOOR CLEANING AND POLISH CARE PRODUCTS

## POWER FLOOR 300 FLOOR CLEANING AND POLISHING CARE PRODUCT




All water-resistant floor tiles, polished and unpolished floor cleaning product that is suitable for daily cleaning and maintenance. PVC, linoleum, rubber, marble, epoxy, natural stone, and so on. All floor coverings, such as the simple cleaning to do with daily mop and machine applications. Polymers are capable of doing with the content of care polish. Product does not create residue and layer. The product has refreshing apple scent.

Art. No.	8899.P1024.20
Packaging	20 L (19,60 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can



### SUITABLE SURFACES

■ APPROPRIATE ■ CONTINGENT IN ACCORDANCE ■ NOT SUITABLE FOR		
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy
■ Linoleum	■ Marble	■ Wood (Polished)
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel
	■ Alum	■ Ceramics / Porcelain



### DOSAGE AND WORKING METHODS




## POWER FLOOR 200

## HEAVY DIRT, VARNISH AND DEGREASER




Settled on the ground, and surface layers of lacquer, easily removes oil and dirt. Prepare a new application of the floor polish, excluding wood and linoleum surface, water and alkali-resistant floor coverings in all. Floor covering manufacturers' use of the information which they provide in terms of technique should be considered.

Art. No.	8899.P1023.20
Packaging	20 L (20,30 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can



### SUITABLE SURFACES

■ APPROPRIATE ■ CONTINGENT IN ACCORDANCE ■ NOT SUITABLE FOR		
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy
■ Linoleum	■ Marble	■ Wood (Polished)
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel
	■ Alum	■ Ceramics / Porcelain



### DOSAGE AND WORKING METHODS





# FLOOR CLEANING AND POLISH CARE PRODUCTS

## DELICATE SURFACES OF DIRT, PAINT AND OIL RIPPER-A VERSATILE CLEANER

### POWER FLOOR 100

That can be used on sensitive surfaces an floor coverins, oil, dirt and varnish layers with the aim of cleaning performance with a powerful universal cleaner. New floor finish prepare the application. All floor coverings in water and alkali-resistant. Care products consisting of layers of film and stubborn dirt. Especially dirt, grease, soot, nicotine, tire tracks, hard surfaces is effective in removing dirt and scratches. Floor covering anufacturers' use of the information which they provide in terms of technique should be considered.




Art. No.	8899.P1022.20
Packaging	20 L (21.40 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can

pH-value of about  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14

#### SUITABLE SURFACES

			■ APPROPRIATE	■ CONTINGENT IN ACCORDANCE	■ NOT SUITABLE FOR
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy			
■ Linoleum	■ Marble	■ Wood (Polished)			
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate			
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces			
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel			
	■ Alum	■ Ceramics / Porcelain			



#### DOSAGE AND WORKING METHODS



### POWER FLOOR POLYMER

## ONTAINING POLYURETHANE ULTRA HARD FLOOR POLISH

PVC, linoleum, wood (varnished) application is used to polish the floor coverings. Floor covering dirt, dust, keep the barriers, drawn prevents wear, wet and provides a brilliant view. Gloss, ultra-hard and bright floor polish. High-speed polishing machine polishing gives an excellent result in the implementation of the maintenance. Considering the age and staleness floor covering is recommended to apply 3-4 coats of varnish. Floor covering manufacturers' use of the information which they provide in terms of technique should be considered.



Art. No.	8899.P1026.05
Packaging	5 L (5,14 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons

pH-value of about  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14

#### SUITABLE SURFACES

			■ APPROPRIATE	■ CONTINGENT IN ACCORDANCE	■ NOT SUITABLE FOR
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy			
■ Linoleum	■ Marble	■ Wood (Polished)			
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate			
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces			
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel			
	■ Alum	■ Ceramics / Porcelain			



#### DOSAGE AND WORKING METHODS



# FLOOR CLEANING AND POLISH CARE PRODUCTS

## POWER FLOOR BRIGHT


## CRYSTALLIZED MARBLE POLISH



It is product used for polishing marble and natural stone floors. Thermo-chemical action on the surface of the ground during the application of water-resistant, natural and shiny appearance. To keep the dirt floor, drawn prevents wear. Considering the floor covering is recommended to apply 3-4 coats of varnish. Floor covering manufacturers' use of the information which they provide in terms of technique should be considered.

Art. No.	8899.PI025.05
Packaging	5 L (5,14 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons

pH-value of about



### SUITABLE SURFACES

			■ APPROPRIATE	■ CONTINGENT IN ACCORDANCE	■ NOT SUITABLE FOR
■ PVC	■ Acid-resistant natural / plastic material	■ Epoxy			
■ Linoleum	■ Marble	■ Wood (Polished)			
■ Elastomeric material (rubber)	■ Cast Mosaic (Terrazzo)	■ Laminate			
■ Polyurethane	■ Acid Proof Tiles	■ Plastic Surfaces			
■ Enriched polyurethane elastic floor coverings	■ Porcelain	■ Chrome / Stainless Steel			
	■ Alum	■ Ceramics / Porcelain			



### DOSAGE AND WORKING METHODS



# FLOOR CLEANING AND POLISH CARE PRODUCTS


## FLOOR CARPET SHAMPOO

## DRY FOAM CARPET SHAMPOO

Synthetic surfaces suitable for use in all types of carpet cleaning, upholstery and leather coatings. Active dirt, oil, solvents and contains specific polymers. For this reason, the dirt repellent fiber protection feature. Is set to neutral and protects the tissues. Color fade and water resistant all carpeted floors (including wool carpets) is ideal. Provides a fast and effective cleaning. After washing the carpet antistatic feature a live appearance. Generator which produces a dry foam carpet cleaning machines are recommended.



Art. No.	8899.P1028.05
Packaging	5 L (5,20 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons




### SUITABLE SURFACES

■ APPROPRIATE 
 ■ CONTINGENT IN ACCORDANCE 
 ■ NOT SUITABLE FOR

■ Carpet



### DOSAGE AND WORKING METHODS

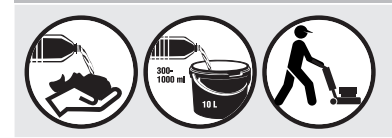


## FLOOR CARPET MAT

## ADJUSTABLE FOAM CARPET CLEANER

Carpeted floors (including wool carpets) for in-depth cleaning and removing stains concentrate, sparkling, sweet-smelling cleaner. Color fade and water-resistant used textile flooring. Is recommended for use with spray-vacuum machines.



Art. No.	8899.P1029.05
Packaging	5 L (5,90 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons



### SUITABLE SURFACES

■ APPROPRIATE 
 ■ CONTINGENT IN ACCORDANCE 
 ■ NOT SUITABLE FOR

■ Carpet



### DOSAGE AND WORKING METHODS



# KITCHEN HYGIENE PRODUCTS

## POWER MATIC PRO


## DISH WASHER DETERGENT FOR HARD WATER



It cleans frozen grease and dirt on plates, cups and other metals. It prevents bad smells in the dishes. It is suitable for glass, porcelain, fork, knife, tray products. It is effective in hard water. Industrial dishwashing machines fitted with dosing pump assembly is recommended.

Art. No.	8899.P1002.05	8899.P1002.20
Packaging	5 L (5,82 kg) can	20 L (23,30 kg) can
Packaging Unit	4 pcs. in the box	1 can
Units Per Pallet	36 cartons	32 can

pH-value of about



## POWER RINSE PRO


## MACHINE CLEAR GLOSS RINSING AGENT FOR HARD WATER



Dishwashers, detergent, rinse, and provides no residue. Porcelain, glass, materials such as stainless steel creates a glow. Rinse the dishes to be washed increases the effectiveness of stains and scratches, allows it to dry quickly without causing contaminants. Effective in hard water. Perfume-free, the smell does not leave. Industrial dishwashing machines fitted with dosing pump assembly is recommended.

Art. No.	8899.P1003.05	8899.P1003.20
Packaging	5 L (5,20 kg) can	20 L (2,70 kg) can
Packaging Unit	4 pcs. in the box	1 can
Units Per Pallet	36 cartons	32 can

pH-value of about



## POWER LIMEX PRO


## DESCALING DISH WASHER



Industrial dishwashers and kitchen appliances are used in order to solve limescale deposits caused by water hardness. High performance with less energy helps to run the heaters. Thanks to the content of the corrosion inhibitors prevent damage.

Art. No.	8899.P1004.05
Packaging	5 L (6,32 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons

pH-value of about




# KITCHEN HYGIENE PRODUCTS

## POWER HAND PRO

## HAND DISHWASHING ARTICLE HIGH-ACTIVE

Specially formulated for hand washing up is a product that contains high active. Frozen oil and food residue, cleans even the most stubborn dirt. Fragrant, abundant foam. Easy to rinse and does not leave stains.

Art. No.	8899.P1001.20
Packaging	20 L (20,60 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can





## POWER FOAM PRO

## HEAVY DIRT AND OIL SOLVENT

Used in kitchens and food processing establishments. High pressure machines, and foam suitable for appliances. With a strong solvent effect on oil and dirt floors, walls, ceilings, work surfaces, machines, grills, cookers, boilers, portholes, sinks and so on. It is a product used to clean areas such as odorless. It can't be used aluminum and painted surfaces.

Art. No.	8899.P1007.05
Packaging	5 L (5,10 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons




## POWER PREP

## SPOT REMOVER PRE-DIPPING ARTICLE

Plates, table d'hôte, porcelain, glass, plastic and stainless steel equipment; dried starch remains, consisting of cups and cups of coffee, tea stains in order to clean the front a product used in dipping process. Hygienic means of the chlorine, as well as the effect of stain removal are also available. Pre-washing is recommended to use the dishwasher to do.

Art. No.	8899.P1020.20
Packaging	20 L (23 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can



# KITCHEN HYGIENE PRODUCTS

## POWER GRILL



## OVEN AND GRILL CLEANING AGENT



It is an odorless product used in the cleaning of burnt oil and dirt formed in kitchen equipment such as oven, grill and hood. Clings to vertical surfaces with a good viscosity and maximum effect.

Art. No.	8899.P1021.75
Packaging	750 ml (820 gr) bottle
Packaging Unit	6 pcs. in the box
Units Per Pallet	128 cartons

pH-value of about

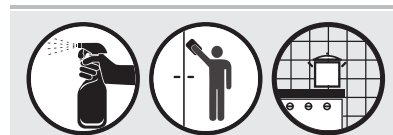

## POWER T-9


## OVEN AND GRILL HIGH PERFORMANCE OIL REMOVER



It is an odorless product used in the cleaning of burnt oil and dirt formed in kitchen equipment such as oven, grill and hood. Clings to vertical surfaces with a good viscosity and maximum effect.

Art. No.	8899.P1015.75	8899.P1015.05
Packaging	750 ml (840 gr) bottle	5 L (5,25 kg) can
Packaging Unit	6 pcs. in the box	4 pcs. in the box
Units Per Pallet	128 cartons	36 cartons

pH-value of about



## POWER SHINE


## STAINLESS STEEL POLISH



Stainless steel, chrome, nickel metal surface cleaning, care and polishing used. Provides clean and shine metal surfaces without scratching. application is made forming a film layer on metal surfaces to retard re-soiling, fingerprints prevents.

Art. No.	8899.P1011.75
Packaging	750 ml (620 gr) bottle
Packaging Unit	6 pcs. in the box
Units Per Pallet	128 cartons

pH-value of about



# KITCHEN HYGIENE PRODUCTS


## POWER INOX

## STAINLESS STEEL CLEANER

Provides clean and shine metal surfaces without scratching. Stainless steel, chrome, nickel metal surface cleaning, maintenance and polishing are used. Delays in the application and fingerprint contamination prevents the formation of metal surfaces. Aerosol form.

Art. No.	8899.P1011.04
Packaging	400 ml. Sprey box
Packaging Unit	12 pcs. in the box
Units Per Pallet	84 cartons

pH-value of about



# KITCHEN HYGIENE PRODUCTS

## POWER METALEX



## METAL TRACE CLEANING



Porcelain, plate, cup etc. Such as forks and knives. Is used to remove scratches that it creates. A clean new look to the materials it saves. It should be used with pre-immersion method.

Art. No.	8899.P1019.05
Packaging	5 L (5,12 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons

pH-value of about



## POWER HYPO PRO



## BASED LIQUID CHLORINE BLEACH



Cleaning of all washable surfaces and floors, bleaching, is used in order to ensure hygiene Bathroom, kitchen and suitable for use in all public areas.

Art. No.	8899.P1018.20
Packaging	20 L (20,60 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can

pH-value of about

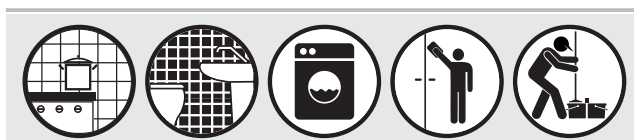

## POWER HYGIENE



## ALCOHOL-BASED FAST HYGIENIC CLEANER



Food processing plants, hospitals, hotels and public areas such as hard surfaces, a product that provides hygienic cleaning tools and equipment. Due to alcohol content, dries quickly without the need for rinsing areas that come into contact with food, it is not corrosive.

Art. No.	8899.P1017.75
Packaging	750 ml bottle
Packaging Unit	6 pcs. in the box
Units Per Pallet	128 cartons

pH-value of about





Working Station 3



# TEXTILE HYGIENE PRODUCTS

## WHITE MATIC

## LITTLE SPARKLE MAIN CLEANING AGENT



Automatic machines used for industrial laundries, each specially designed to give the best results at the main washing agent. Used for cleaning colored and white laundry. Cotton synthetic fiber blends, etc.. Textiles, such as appropriate. Foam control. Has a refreshing scent.

Art. No.	8899.T1030.20
Ambalaj Türü	20 kg bag
Ambalaj Birimi	1 bag
Palet - Birimi	48 bag



## WHITE MATIC PRO

## COMPLATE CONTAINS BLEACH AND TAED MAIN WASHING AGENT



Laundries, used in all types of industrial washing machines and all kinds of cotton textiles, synthetic fibers blended main wash complete the appropriate agent. Contain oxygenbased bleach and TAED. At low temperature (50 ° C-60 ° C) bleaching effect of a product. Many thanks to the high content of assets without the need for laundry detergents to help serve you better results. Colorful textiles, color accuracy test should be performed.

Art. No.	8899.T1035.20
Ambalaj Türü	20 kg bag
Ambalaj Birimi	1 bag
Palet - Birimi	48 bag




## COLOR MATIC PRO

## ENZYME, BLEACH MAIN WASHING AGENT



Laundries, industrial type washing machines that can be used all kinds of cotton and synthetic blended fibers used in the main wash to wash all kinds of textile material. Bleach material is free. Colored and white clothes can be used safely. Prevents graying of laundry each water temperature is effective.

Art. No.	8899.T1034.20
Ambalaj Türü	20 kg bag
Ambalaj Birimi	1 bag
Palet - Birimi	48 bag




# TEXTILE HYGIENE PRODUCTS

## OILEX MATIC PRO

HEAVY DIRT, OIL AND BLOOD SOLVENT AUXILIARY WASHING AGENT

Heavy dirt, oil, used to clean clothes with blood, alkali dust auxiliary washing agent. To increase the power of the main washing agent, textile cleaning product. Bleach or bleaching effect can be used with any main washing detergent. 60 ° C temperatures above the main washing detergent used in conjunction with highly successful results. It can't be used for wool and sensitive clothes

Art. No.	8899.T1033.10
Ambalaj Türü	10 kg bucket
Ambalaj Birimi	1 bucket
Palet - Birimi	50 bucket




## OXYGEN MATIC PRO

OXYGEN-BASED BLEACH AND STAIN REMOVER AUXILIARY WASHING AGENT

Thanks to the composition of the active oxygen stain remover and bleach safe. Has been formulated for all kinds of heavy dirt and stains. At temperatures above 60 ° C maximum performance. White in color, cotton, synthetic and mixed with suitable washing agent for textiles. With the main cleaning agent is recommended. After the color sensitivity of the test used in colored clothes.

Art. No.	8899.T1032.10
Ambalaj Türü	10 kg bucket
Ambalaj Birimi	1 Kova bucket
Palet - Birimi	50 bucket




## CHLORINE MATIC PRO

BASED CHLORINE BLEACH AND STAIN REMOVER AUXILIARY WASHING AGENT

Help contain chlorine-based bleach washing agent. White, cotton and fiber mixture used for the removal of stains and bleaching of textiles. Hygienic. Thanks to the organic active chlorine at 20 ° C-50 ° C, even excellent stain removal and bleaching capability. It is suitable for white clothes and cotton textiles in particular, the product should not be used over 60 ° C. Effective in all water hardness. Colored clothes should not be used.

Art. No.	8899.T1031.10
Ambalaj Türü	10 kg bucket
Ambalaj Birimi	1 bucket
Palet - Birimi	50 bucket




## SOFTENER

FABRIC SOFTENER

Relieves stiffness of laundry during washing prevents the static electricity, the iron is convenience. Against wear and tear of daily use during the laundry protects, softens the skin. Pleasant smell. Dust and dirt retard textiles, detergent, and rinse prevents the accumulation is easy.

Art. No.	8899.T1036.20
Ambalaj Türü	20 L jerrycan
Ambalaj Birimi	1 jerrycan
Palet - Birimi	32 jerrycan



# PERSONAL HYGIENE AND MAINTENANCE PRODUCTS


## LIQUID HAND

## LIQUID HAND WASHING AGENT BLUE



Glycerin-containing liquid washing agent used to clean hands and face. Suitable skin pH. Plenty of foam, easy to rinse. Skin protective agents. Hygienic and economical. It is recommended for use with liquid soap dispensers.

Art. No.	8899.P1005.20M
Packaging	20 L (20,60 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can




## LIQUID HAND PRO

## LIQUID HAND WASHING AGENT WHITE



Excellent cleaning power, removes impurities and softens the skin in a good way liquid hand washing agent. When washing hands with cream protects and softens the content. Has a pleasant odor. It is recommended for use with liquid soap dispensers.

Art. No.	8899.P1005.20B
Packaging	20 L (20,60 kg) can
Packaging Unit	1 can
Units Per Pallet	32 can



## FOAM HAND PRO

## FOAM HAND WASHING AGENT



Used to clean hands and face sparkling, sanitary effective skin cleaning agent. Leaves a pleasant softness after washing hands. Suitable skin pH. Easy to rinse, and affordable. Skin protective agents. It is recommended for use with foam dispensers.

Art. No.	88899.P1008.05
Packaging	5 L (5,08 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons



## PERSONAL HYGIENE AND MAINTENANCE PRODUCTS

### POWER HAND DEZENFEX

### ALCOHOL-BASED HAND HYGIENE CLEANING ARTICLE

Is used to clean the hands hygienically. High-risk areas (food manufacturers, kitchen staff, health workers and so on. like) suitable for use. special formula does not irritate the skin through. Any negative effect on the skin, food safety does not leave a residue. There is no need to rinse because it contains alcohol.

Art. No.	8899.P1016.05
Packaging	5 L (4,05 kg) can
Packaging Unit	4 pcs. in the box
Units Per Pallet	36 cartons



### POWER FRESH

### AIR FRESHENER - FRAGRANCE OIL, LEMON FLAVORED

Refreshing lemon flavor with a long-lasting fragrance oil. It contains heavy Thanks to destroys offensive odors perfume the environment leaves a pleasant smell permanently. Bathroom, toilet areas or brush the back of the toilet is enough to repel the inside of the box. Remains in effect up to 6 hours a refreshing fragrance. In Rooms should not be applied on textile use.

Art. No.	8899.P1014.05
Packaging	500 ml. (500 gr) sprej box
Packaging Unit	6 pcs. in the box
Units Per Pallet	155 cartons

pH-value of about



# AKSESUAR ÜRÜN GRUBU

**TOPDOS TITLE 20 ML DOSAGE**



6004.00015.20

**ENTITLED SPRAYING 650 ML**



6004.00015.22

**FOAM APPARATUS 650 ML**



6004.00015.23

**ENTITLED SPRAYING 500 ML**



6004.00015.21

**DETERGANT PUMP GMP 7**



6262.DETP7.00

**RISING PUMP GRP 3**




6262.PARP3.00

**DIGITAL CONVEYOR PUMP**



6262.DR350.00

**MIX 1**

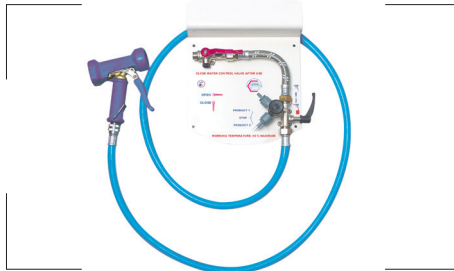

6262.30666.15

**MICROFIBER CLEANING CLOTHS**



6004.00005.12 BLUE

6004.00005.13 YELLOW

6004.00005.14 PINK

# GLASS WASHERS



- Stainless Steel Body including washing and boiler tank
- Hygienic washing tank
- 30 racks per hour (Rack dimension 35 x 35 cm)
- 2.5 lt water consumption per cycle
- Automatic, user friendly electromechanical control panel
- 1 Washing Programme - Cycle 120 seconds
- Saves energy, detergent and water
- Washing arms in reinforced polypropylene
- Adjustable feet for height optimization
- Easy start up: one button to fill in and heat water in the boiler tank
- Electrical components and cabling according to international standards and security regulations.
- Completely sealed body to guarantee IPX5 water protection
- Thermostat-controlled rinse and washing temperature for efficient washing
- Non-return - Check valve System
- Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- Rinsing temperature at 80-85 °C (water supply at a minimum of 2 bar and 50°C)

## OBY 35M PDT

Glasswasher



STANDARD EQUIPMENT	OBY 35M 073M.00000.AD	OBY 35M P 073M.10000.AD	OBY 35M PT 073M.10010.AD	OBY 35M PD 073M.11000.AD	OBY 35M PDT 073M.11010.AD
Detergent Dispenser	-	-	-	✓	✓
Rinse Aid Dispenser	-	✓	✓	✓	✓
Rinsing Pump	-	-	-	-	-
Drain Pump	-	-	✓	-	✓
1 Glass Rack Promotional with cutlery and cup holders	✓	✓	✓	✓	✓

## Technical Features

Electric Connection	230V~NPE / 50Hz	Water inlet pressure / Temp.	2-4 Bar / 50 °C
Total rating	3.3 kW	Heat power (Washing/Rinsing)	2 / 3 kW
Washing capacity (glass/hr)	500 glass / verre (Max.)	Dirty water discharge connection	3/4 " (Ø 28 mm)
Washing capacity (basket/hr)	30	Maximum noise	70 dBA
Washing / Boiler tank capacity	9,2 / 2,8 lt	Gross weight	35 (±5) kg
Washing program number	1	Dimensions (LxWxD)	420x450x630 mm
Program times (seconds)	120	Protection class	IPX5
Washing water temp.	55-60°C	Rack dimension	35 x 35 cm
Rinsing water temp.	80-85 °C (max.)	Useful Loading height	225 mm
Water inlet connection	3/4 "	Inclination	6°
Washing pump power	0.27 kW		

# DISHWASHERS



## OBY 500 E PLUS OBY 500 PLUS







### Dishwasher

- Stainless Steel Body including washing and boiler tank
- Hygienic washing tank
- 35 rack per hour (Rack dimension 50 x 50 cm)
- 2.8 l water consumption per cycle
- Automatic, user friendly control panel
- 2 Washing Programme - - Cycle 102-192 seconds
- Saves energy, detergent and water
- Washing arms both available in stainless steel and reinforced polypropylene
- Adjustable feet for height optimization
- Easy start up: one button to fill in and heat water in the boiler tank
- Electrical components and cabling according to international standards and security regulations.
- Completely sealed body to guarantee IPX5 water protection
- Thermostat-controlled rinse and washing temperature for efficient washing
- Non-return - Check valve System
- Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- Rinsing temperature at 80-85°C (water supply at a minimum of 2 bar and 50°C)

STANDARD EQUIPMENT	OBY 500 E 0710.00500.00	OBY 500 ES 0710.00500.16	OBY 500 ET 0710.00500.06	OBY 500 E PLUS 0710.00500.17	OBY 500 0710.00500.01	OBY 500 S 0710.00500.18	OBY 500 T 0710.00500.07	OBY 500 PLUS 0710.00500.03
Detergent Dispenser	-	✓	-	✓	-	✓	-	✓
Rinse Aid Dispenser	✓	✓	✓	✓	✓	✓	✓	✓
Rinsing Pump	-	-	-	-	✓	✓	✓	✓
Drain Pump	-	-	✓	✓	-	-	✓	✓
3 Baskets Promotional (Plate, Glass and Cutlery )	✓	✓	✓	✓	✓	✓	✓	✓
Stainless Steel Washing Arms	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT

## Technical Features

Electric Connection	230V~NPE / 50Hz	Water inlet pressure / Temp.	2-4 Bar / 50 °C
Total rating	5.5 kW	Heat power (Washing/Rinsing)	2 / 5 kW
Washing capacity (plate/hr)	560 plate (Max.)	Dirty water discharge connection	1 1/4 " (Ø 42 mm) OBY 500 E / OBY 500 ES OBY 500 / OBY 500 S
Washing capacity (basket/hr)	35 / 18		3/4 " (Ø 28 mm) OBY 500 ET / OBY 500 E PLUS OBY 500 T / OBY 500 PLUS
Washing / Boiler tank capacity	30 / 6 lt	Maximum noise	75 dBA
Washing program number	2	Gross weight	70 (±5) kg
Program times (seconds)	102 / 192	Dimensions (LxWxD)	595x655x830mm
Washing water temp.	55-60°C	Protection class	IPX5
Rinsing water temp.	80-85 °C (max.)	Rack dimension	50 x 50 cm
Water inlet connection	3/4 "	Useful Loading height	325 mm
Washing pump power	0.66 kW	Inclination	6°
Rinsing pump power	0,37 kW OBY 500 / OBY 500 S / OBY 500 T / OBY 500 PLUS		



# DISHWASHER



## OBM 1080M PDRT OBM 1000M



### Hood Type Dishwashers /

- Stainless Steel Body including washing and boiler tank
- Monoblock washing tank with round corners - Hygienic
- 69 rack per hour for OBM 1080M PDRT
- 50 rack per hour for OBM 1000M
- 2.8 lt water consumption per cycle
- OBM 1000M: 1 Selectable Washing Programmes
- OBM 1080M PDRT: 3 Selectable Washing Programmes
- Suitable for corner or in-line installation
- Easy to use electromechanical control panel
- Washing arms both available in stainless steel and reinforced polypropylene
- Stainless steel washing arms are optional.
- Contains stainless steel tank filter.
- Adjustable feet for height optimization
- Easy start up: one button to fill in and heat water in the boiler tank
- Electrical components and cabling according to international standards and security regulations
- The dishwasher is completely sealed to guarantee IPX5 water protection
- Thermostat-controlled rinse and washing temperature for efficient washing
- Non-return - Check valve System
- Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- Rinsing temperature at 80-85°C (water supply at a minimum of 2 bar and 50°C)

STANDARD EQUIPMENT	OBM 1080M P 071M.10000.BB	OBM 1080M PDT 071M.11010.BB	OBM 1080M PDR 071M.11100.BB	OBM 1080M PDRT 071M.11110.BB	OBM 1080M R 071M.00100.BB	OBM 1080M RT 071M.00110.BB	OBM 1000M 071M.00000.BC	OBM 1000M PD 071M.11000.BC
Detergent Dispenser	-	✓	✓	✓	-	-	-	✓
Rinse Aid Dispenser	✓	✓	✓	✓	-	-	-	✓
Rinsing Pump	-	-	✓	✓	✓	✓	-	-
Drain Pump	-	✓	-	✓	-	✓	-	-
3 Baskets Promotional (Plate, Glass and Cutlery )	✓	✓	✓	✓	✓	✓	✓	✓
Stainless Steel Washing Arms	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT

## Technical Features

Electric Connection	400V 3NPE / 50 Hz	Water inlet pressure / Temp.	2-4 Bar / 50 °C
Total rating	9.66 kW 8.16 kW /OBM 1000M - OBM 1000M PD	Heat power (Washing/Rinsing)	3 / 9 kW 3 / 7.5 kW /OBM 1000M - OBM 1000M PD
Washing capacity (plate/hr)	1108 plate (Max.) 750 plate OBM 1000M - OBM 1000M PD	Dirty water discharge connection	1 1/4 " (Ø 42 mm) OBM 1080M P / OBM 1080M PDR OBM 1080M R / OBM 1000M / OBM 1000M PD
Washing capacity (basket/hr)	69/35/27 50 /OBM 1000M - OBM 1000M PD		3/4 " (Ø 28 mm) OBM 1080M PDT OBM 1080M PDRT / OBM 1080M RT
Washing / Boiler tank capacity	19 / 7 lt	Maximum noise	75 dBA
Washing program number	3 1 /OBM 1000M - OBM 1000M PD	Gross weight	110 (±5) kg
Program times (seconds)	52/102/132 72 /OBM 1000M - OBM 1000M PD	Dimensions (LxWxD)	700x790x1420 (1860) mm
Washing water temp.	55-60°C	Protection class	IPX5
Rinsing water temp.	80-85°C	Rack dimension	50 x 50 cm
Water inlet connection	3/4"	Useful Loading height	380 mm
Washing pump power	0.66 kW	Inclination	6°
Rinsing pump power	0.37 kW OBM 1080M PDR / OBM 1080M PDRT OBM 1080M R / OBM 1080M RT		

# DISHWASHER



## OBK 1500 E

## OBK 1500



### Conveyor Type Dishwasher /

- Stainless Steel Body including washing and boiler tank
- Hygienic washing tank
- 100 rack per hour (Rack dimension 50 x 50 cm)
- Effective drying through a high powered fan
- 3 lt water consumption per cycle
- Automatic, user friendly control panel
- Continuous Washing through Conveyor System with dryer
- Saves energy, detergent and water
- Stainless steel washing arms
- Adjustable feet for height optimization
- Easy start up: one button to fill in and heat water in the boiler tank
- Electrical components and cabling according to international standards Vand security regulations.
- Completely sealed to guarantee IPX5 water protection
- Thermostat-controlled rinse and washing temperature for efficient washing
- Non-return - Check valve System
- Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- Rinsing temperature at 80-85°C (water supply at a minimum of 2 bar and 50°C)

### OBK 1500

Code (right)	0710.01500.02
Code (left)	0710.01500.03
Electric Connection	400V~3NPE / 50Hz
Total rating	47 kW
Washing capacity (plate/hr)	1650 plate (Max.)
Washing capacity (basket/hr)	100
Washing / Boiler tank capacity	90 / 18 lt
Washing program number	-

Program times	-
Washing water temp.	55-60°C
Rinsing water temp.	80-85 °C (max.)
Water inlet connection	3/4 "
Washing pump power	1,5 kW
Rinsing pump power	0.37 kW
Water inlet pressure / Temp.	2-4 Bar / 50 °C
Heat power (Washing/Rinsing)	9 / 27 kW

### Technical Features

Drying Fan Power	8 kW
Dirty water discharge con.	1 1/4 " (Ø 42 mm)
Maximum noise	80 dBA
Gross weight	270 (±5) kg
Dimensions (LxWxD)	800x2050x1880 mm
Protection class	IPX5
Rack dimension	50 x 50 cm
Useful Loading height	42 cm
Inclination	6°

### OBK 1500 E


Code (right)	0710.01500.00
Code (left)	0710.01500.01
Electric Connection	400V~3NPE / 50Hz
Total rating	38 kW
Washing capacity (plate/hr)	1650 plate (Max.)
Washing capacity (basket/hr)	100
Washing / Boiler tank capacity	90 / 18 lt
Washing program number	-

Program times	-
Washing water temp.	55-60°C
Rinsing water temp.	80-85 °C (max.)
Water inlet connection	3/4 "
Washing pump power	1,5 kW
Rinsing pump power	0.37 kW
Water inlet pressure / Temp.	2-4 Bar / 50 °C
Heat power (Washing/Rinsing)	9 / 27 kW

### Technical Features

Drying Fan Power	-
Dirty water discharge con.	1 1/4 " (Ø 42 mm)
Maximum noise	80 dBA
Gross weight	220 (±5) kg
Dimensions (LxWxD)	800x1750x1500 mm
Protection class	IPX5
Rack dimension	50 x 50 cm
Useful Loading height	42 cm
Inclination	6°





[www.ozti.com.tr](http://www.ozti.com.tr)

Merkez: Cumhuriyet Mah. Eski Hadimköy Yolu Cad. No:8 34500 Büyükçekmece / İstanbul - Türkiye  
Tel: + 90 212 886 78 00 Fax: + 90 212 886 78 09